


WHAT'S IN THE BOX




Disconnect Tools

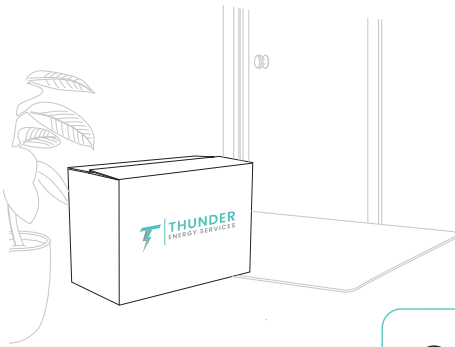


These are fitted to the unused MC4 connectors.


MC4 Caps
• 460W kit only: x1



Microinverter

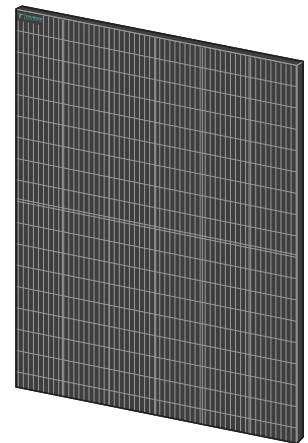


Rigid Solar Panel • 460W kit: x1
• 920W kit: x2

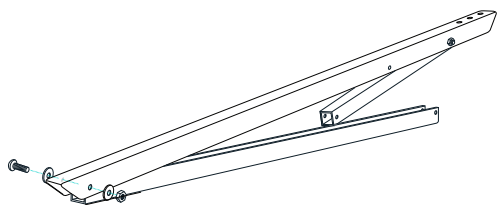

Mounting Bracket
• or flat roof mounting options, depending on selection




DC Extension Cable • 460W kit: x2
• 920W kit: x4

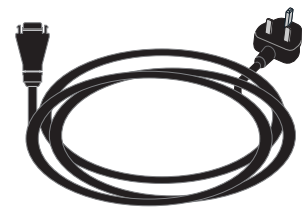


AC Connection Cable

INSTALLATION


Bracket allows Panel to be hung from a railing, a wall or the ground

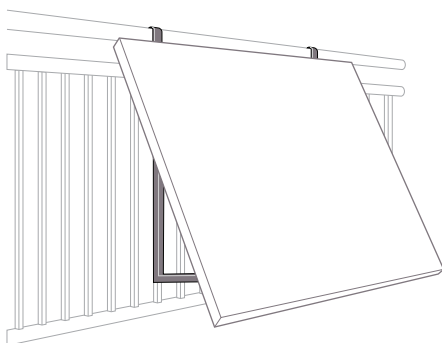

Railing

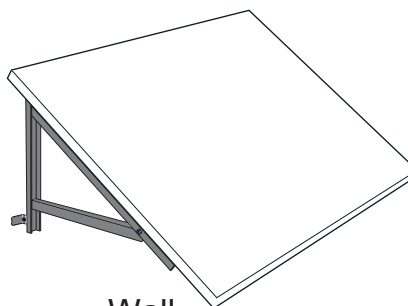


Wall

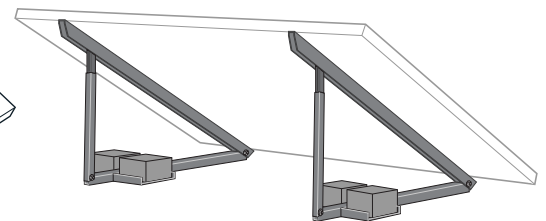


Ground

SOLAR PANEL CONNECTIONS

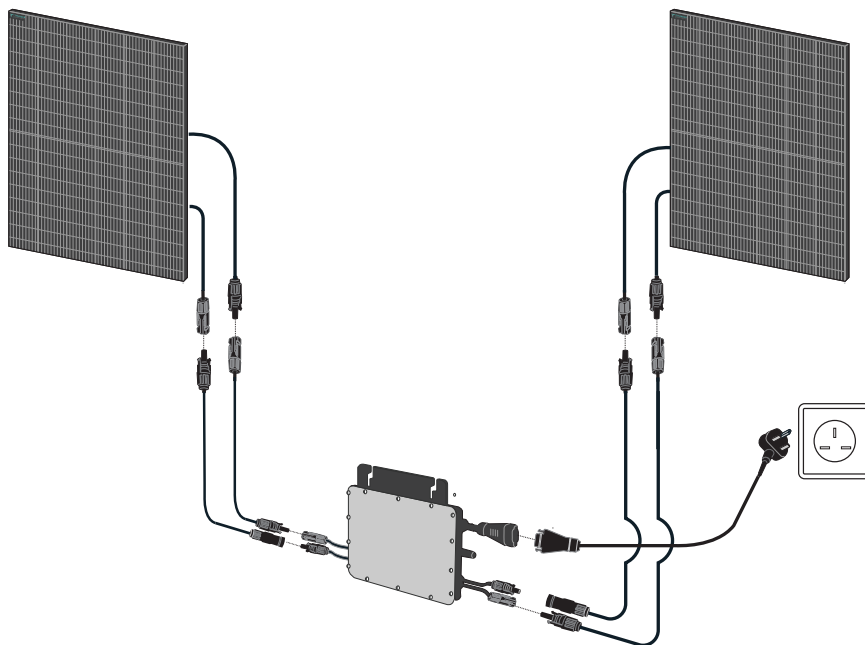

Optional Upgrade to Bolt Plus



If you add the optional battery to your kit, the microinverter connects to the battery, and a second AC cable from the battery connects to your home via a fused spur. For more information, see our Thunder Bolt Plus solar kits with battery.



MONITOR YOUR SYSTEM

- STEP ①** Download the S-Miles Home App
 - Android: Search Google Play for S-Miles Home.
 - iPhone: Search App Store for S-Miles Home.
- STEP ②** Open the S-Miles Home and tap register.
- STEP ③** Tap System > Add System
- STEP ④** Add your devices: Tap the microinverter icon and enter the PIN code (default: 123456)
- STEP ⑤** Select your router's Wi-Fi and enter the password.
- STEP ⑥** Fill out the registration form with the required information. Then tap Confirm.

